


mOLL special

The reliable energy source for hobby, solar applications and mobility

mOLL special GEL

The **mOLL special GEL** is a valve regulated lead-acid battery (VRLA) with Calcium/Calcium grid plates with special alloy and gel electrolyte.


- supply battery for caravans and solar applications
- highest cycling performance in GEL Technology
- absolutely maintenance-free
- absolutely spill-proof

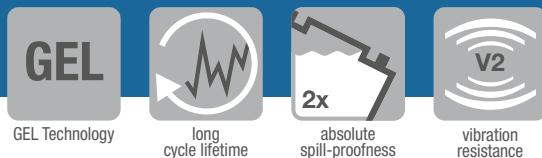

mOLL special AGM

The absorption of the electrolyte in special glass-mat separators (AGM = Absorbent Glass Mat) turns the **mOLL special AGM** into an absolute spill-proof battery in any position, even when the container is damaged.

- supply battery
- very high cycling performance in AGM Technology
- absolutely maintenance-free
- absolutely spill-proof

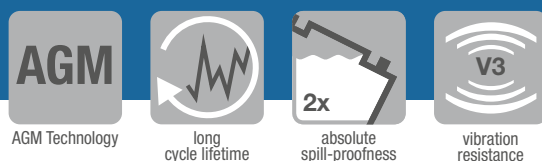

mOLL special EFB

mOLL EFB Technology with increased cycling performance for power supply.

- mobile energy for electrical drives and lighting
- high cycling performance in EFB Technology
- ideal price-performance-ratio



MOLL type no.	applicable for		capacity								max. outer dimensions [mm]			main application
	MOLL fun	MOLL solar	KAMINA central degassing	double lid	vibration resistance level	wet charged	base hold-downs	terminal position	terminal type	Ah (100h)	Ah (20h)	Ah (5h)	length	

MOLL special GEL 12V

86080					2	•	B13	0	1	90	80	70	353	175	190	caravan, solar, mover, bus, signal installation, etc.
86210					2	•		3	1	235	210	180	518	273	240	

MOLL special AGM 12V

87060			•	3	•	B13	0	1	65	60	50	242	175	190	boat, taxi, service vehicle, small-scale solar application, etc.
87070			•	3	•	B13	0	1	75	70	58	278	175	190	
87095			•	3	•	B13	0	1	100	95	76	353	175	190	

MOLL special EFB 12V

88050	55025, 95405	80060	•	3	•	B3	0	1	60	50	40	207	175	190	solar, lift truck
88060	56050, 95501		•	3	•	B13	0	1	70	60	50	242	175	190	solar, lift truck
88067	56702, 95556		•	3	•	B13	0	1	75	67	55	278	175	175	solar, lift truck
88080	58024, 95601		•	3	•	B13	0	1	90	80	60	278	175	190	solar, lift truck
88090	59029, 95751	80100	•	3	•	B13	0	1	100	90	75	353	175	190	solar, lift truck, taxi
88120		80130	•	3	•		0	1	130	120	90	352	175	232	solar, lift truck
88130	(63011, 96051)	80140	•	*	3	•	3	1	140	130	105	513	189	223	solar, lift truck
88180	68002, 96353	80180	•	*	3	•	3	1	190	180	135	513	223	223	solar, lift truck, bus
88230	73002, 96803	80240	•	3	•		3	1	240	230	180	518	276	242	caravan, solar, lift truck, bus

MOLL special 6V

24015	91801		•				0	1		240	180	244	190	275	lift truck, electric vehicle
-------	-------	--	---	--	--	--	---	---	--	-----	-----	-----	-----	-----	------------------------------

All information according to EN 50342

* Changeover to double lid in planning

Scope of application (MOLL special)

