

MOLL Kamina truck

MegaGrid Technology

Leading truck manufacturers trust in MOLL Kamina truck

The **MOLL Kamina truck** is characterized by exceptionally high cycling performance.

This high cycling performance results from the combination of two different alloys specially developed for the manufacture of the MegaGrids. For the customer, this means – especially when many electric consumers are in use – highest lifetime.

The robust solution for professionals.



Customer benefits of the MOLL Kamina truck


- robust Super Heavy Duty quality
- with the advantages of MOLL EFB Technology
- powerful performance
- very long cycle life
- highly vibration-resistant

Fields of application

- trucks
- buses
- construction machines
- communal vehicles
- agricultural machinery
- inland waterway crafts



MOLL Kamina truck - main features at a glance

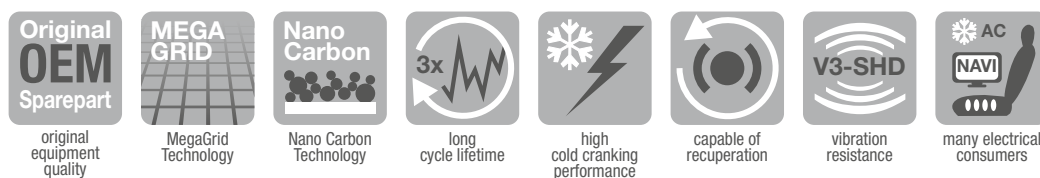

MOLL type no.	applicable for	KAMINA		vibration resistance level	wet charged	base hold-downs	terminal position	terminal type	capacity Ah (20h)	cold cranking current A (EN)	max. outer dimensions [mm]		
		central degassing	double lid								length	width	height

moll Kamina truck

600 026 060	58411, 58811, 59012			3	•		0	1	100	600	413	175	220
605 027 068	59616, 61048			3	•		1	1	105	680	350	175	239
605 028 068	59615, 61047			3	•		0	1	105	680	350	175	239
610 040 076	61023	•		3	•	B3	3	1	110	760	514	175	210
620 034 068	60511, 61017		*	3	•		3	1	120	680	513	189	223
620 045 068		•	*	3	•		3	1	120	680	513	189	223
625 012 072	62511			3	•		0	1	125	720	349	175	290
625 014 072				3	•		1	1	125	720	349	175	290
625 023 000				3	•		2	1	125	-	286	269	230
635 043 100	63539, 63544	•		3	•	B3	3	1	135	1000	514	175	210
640 020 076	61511, 63530, 64035		*	3	•		3	1	140	760	513	189	223
640 036 076	63531, 64033		*	3	•	B3	3	1	140	760	513	189	223
643 017 090	63511, 64311/27, 65012		*	3	•		3	1	143	900	513	223	223
643 029 095	64323/33	•		3	•	B3	3	1	143	950	514	218	210
670 018 100	64317, 65513, 66514, 67043		*	3	•		3	1	170	1000	513	223	223
670 033 100	67015, 67034	•		3	•	B3	3	1	170	1000	514	218	210
680 019 100	67032		*	3	•	B3	3	1	180	1000	513	223	223
680 032 100	67043, 68034		*	3	•		3	1	180	1000	513	223	223
725 012 115	70027, 70038, 71014, 72018	•		3	•		3	1	225	1150	518	276	242

All information according to EN 50342

* Changeover to double lid in planning